

Wires
Posts
Insulators

Energisers
Fencing
Accessories



CDS Agri wholesale, Skreen, Co. Sligo.
Tel 071 91 66616 | E-mail: sales@cdsagri.ie
Web: www.cdsagri.ie | www.chapron-international.com

Mains Energisers

All chapron fencers are * EU A 12 Compliant, *come with a 3 year warranty *Have automatic fault tolerance



BUFFALO F15

Code **28,000,043**



***Bi advanced technology:** double transformers, allows a max tension of 15000 v and 3500 V at 50 Ω. * 15 joules in one pulse. * 5 levels of power to compensate precisely the loss on the fence line. *Low consumption in standard level. *Delivers its maximum power in extreme conditions (such as vegetation and very long fences). *Managed by a microprocessor

Input 230 v - 50 Hz

Voltage 15000 V

Maximum output joules 30J

Energy in joules (EC standard) 15J

Max fence length 100 kms

Max area recommendation 300 ac



SEC 15000

Code **28,000,521**

Input 230 v - 50 Hz

Voltage 15000 V

Maximum output joules 8J

Energy in joules (EC standard) 5J

Max fence length 70 kms

Max area recommendation 155 ac



SEC 10000

Code **28,000,031**

Input 230 v - 50 Hz

Voltage 13500 V

Maximum output joules 5J

Energy in joules (EC standard) 4.5J

Max fence length 50 kms

Max area recommendation 115 ac



SEC 3000

Code **28,000,621**

Input 230 v

Voltage 8500 V

Maximum output joules 2.2J

Energy in joules (EC standard) 1.8J

Max fence length 4 kms

Max area recommendation 15 ac



EASYGUARD

Code **28,000,641**

Input 230 v

Voltage 7200 V

Maximum output joules 1J

Energy in joules (EC standard) 0.8J

Max fence length 1.5 kms

Max area recommendation 3 ac



HYBRID H32

Code **28,000,611**

Input 230 v - 50 Hz

Hybrid system (mains or battery) or 12 Vdc

Voltage 15000 V

Maximum output joules 3.2J

Energy in joules (EC standard) 5J

Max fence length 30 kms

Max area recommendation 50 ac

Battery Energisers

3 Year Warranty & Automatic Fault Tolerance

MASTER RANGE

MASTER 50

Code **28,000,631**

Input	12 V
Consumption	300 mA
Voltage	10000 V
Max joules	4.5 J
Max area recommendation	30 ac
Max fence length	15 kms

* Variable power control

Solar option (30W panel)



MASTER 40

Code **28,000,441**

Input	12 V
Consumption	150 mA
Voltage	15000 V
Max joules	3 J
Max area recommendation	20 ac
Max fence length	10 kms

* Variable power control

Solar option (30W panel)



MASTER 30

Code **28,000,431**

Input	12 V
Consumption	80 mA
Voltage	15000 V
Max joules	2.5 J
Max area recommendation	15 ac
Max fence length	6 kms

* Variable power control

Solar option (20W panel)



MASTER 12

Code **28,000,421**

Input	9 v / 12 V
Consumption	30-50 / 45- 80 mA
Voltage	8200 V
Max joules	1.9 J
Max area recommendation	8 ac
Max fence length	4 kms

2 power positions

Solar option (10W panel)



BERGER RANGE

BERGER 40

Code **28,000,241**

Input	12 V
Consumption	150 mA
Voltage	15000 V
Max joules	3 J
Max area recommendation	20 ac
Max fence length	10 kms

* Variable power control

Solar option (30W panel)



BERGER 30

Code **28,000,211**

Input	12 V
Consumption	80 mA
Voltage	15000 V
Max joules	2.5 J
Max area recommendation	15 ac
Max fence length	6 kms

* 2 power positions

Solar option (20W panel)



BERGER 12

Code **28,000,051**

Input	9v / 12 V
Consumption	30-50 / 45- 80 mA
Voltage	8200 V
Max joules	1.9 J
Max area recommendation	8 ac
Max fence length	4 kms

2 power positions

Solar option (10W panel)



SILVER

Code **28,000,221**

Input	9v / 12 V
Consumption	35 mA / 12 mA
Voltage	6200 V
Max joules	0.3 J
Max area recommendation	2 ac
Max fence length	1 kms

Solar option (5W panel)



Battery Energisers & Solar



ECO 9

Code 28,000,661

Input	9v / 12 V
Consumption	35 mA / 12 mA
Voltage	6200 V
Max joules	0.25 J
Max area recommendation	2 ac
Max fence length	1 kms



INTEGRATED SOLAR FENCERS



SC70

Code 28,000,861

Input	Integrated 12 V
Consumption	45 mA
Voltage	10000 V
Max joules	0.7 J
Max area recommendation	8 ac
Max fence length	4 kms



SC25

Code 28,000,741

Input	Integrated 12 V gel battery
Consumption	35 mA
Voltage	6200 V
Max joules	0.25 J
Max area recommendation	2 ac
Max fence length	1 kms



SOLAR PANELS

Code 10,000,252

Solar panel 5 W
+ Support



Code 10,000,402

Solar panel 20 W
+ Support + 2 tri pod feet



Code 10,000,262

Solar panel 10 W
+ Support



Code 10,000,512

Solar panel 30 W
+ Support + 2 tri pod feet



Poly Wires / Cordes / Ropes



TORFIX POLY WIRE

Code **40,000,452** 200 m

Code **40,001,222** 400 m

2 galvanised wires, 0.50 mm with regular contact for Hybrid of poly wire & permanent wire.

Electric resistance 0.30 Ohm/M

Breaking strength 120 kgs



SUPER BRAIDED CORD 4 MM

Code **40,000,542** 200 m

Code **40,000,552** 400 m

6 SS wires, 0.20 mm 18 HDPE yarns UV protected. Centre in polyethylene.

Electric resistance 4.4 Ohm/M

Breaking strength 130 kgs



STAR 30

Code **40,000,932** 200 m

Code **40,000,792** 350 m

6 SS wires, 0.30 mm 24 HDPE yarns 40/100 UV protected.

Electric resistance 1.95 Ohm/M

Breaking strength 120 kgs



STAR 9

Code **40,000,432** 200 m

Code **40,000,702** 400 m

9 SS wires, 0.20 mm 30 HDPE yarns UV protected.

Electric resistance 2.58 Ohm/M

Breaking strength 92 kgs



POLY 9

Code **40,000,061** 250 m

Code **40,000,084** 500 m

9 SS wires, 0.15 mm 18 HDPE yarns UV protected.

Electric resistance 4.59 Ohm/M

Breaking strength 53 kgs



POLY 6

Code **40,000,064** 250 m

Code **40,000,081** 500 m

6 SS wires, 0.15 mm 18 HDPE yarns UV protected.

Electric resistance 6.89 Ohm/M

Breaking strength 52 kgs



FLUOSTAR HIGH-VIZ

Code **40,001,382** 200 m

Code **40,000,052** 400 m

2 SS wires, 0.30 mm 1 SS wire .25 mm 21 HDPE yarns UV protected.

Electric resistance 3.1 Ohm/M

Breaking strength 51 kgs



6 MM ROPE

Code **40,000,152** 200 m

Code **40,000,492** 500 m

6 SS 0.20 mm PP Filament UV protected.

Electric resistance 4.4 Ohm/M

Breaking strength 350 kgs



ELECTRIC BUNGEE

Code **40,001,262** 25 m

Code **40,001,264** 100 m

Diameter 7 mm 3 SS 0.20 mm

Polytapes



PRESIGE TAPE

Code **40,000,892** GREEN 40MM

Length 200m

Number of conductors 10

Stainless Steel 0.40

Breaking strength in kgs 170

Electric resistance in Ohm/M 0.57

Code **40,000,612** GREEN 20MM

Length 200m

Number of conductors 6

Stainless Steel 0.40

Breaking strength in kgs 108

Electric resistance in Ohm/M 1.02



POLYTAPE RANGE

Code **40,000,442** WHITE 10MM

Length 200m

Number of conductors 3

Stainless Steel 0.20

Breaking strength in kgs 70

Electric resistance in Ohm/M 7.40

Code **40,000,092** WHITE 12.5MM

Length 200m

Number of conductors 4

Stainless Steel 0.20

Breaking strength in kgs 80

Electric resistance in Ohm/M 5.55



Code **40,000,102** WHITE 20MM

Length 200m

Number of conductors 5

Stainless Steel 0.20

Breaking strength in kgs 125

Electric resistance in Ohm/M 4.56

Code **40,000,112** WHITE 40MM

Length 200m

Number of conductors 8

Stainless Steel 0.20

Breaking strength in kgs 130

Electric resistance in Ohm/M 2.72



POLYTAPE ORANGE

Code **40,000,322** 12.5MM

Length 200m

Number of conductors 4

Stainless Steel 0.20

Breaking strength in kgs 80

Electric resistance in Ohm/M 5.55



FLUOTAPE HIGH-VIZ

Code **40,001,322** 12MM

Length 200m

Number of conductors 3

Stainless Steel 0.20

Breaking strength in kgs 70

Electric resistance in Ohm/M 7.40



RACING TAPE

Code **40,000,101** 20MM

Length 200m

Number of conductors 5

Stainless Steel 0.20

Breaking strength in kgs 125

Electric resistance in Ohm/M 4.56

Insulators



N1984

Black screw-in Insulator
Pack of 25

Code **50,000,282**



Bucket of 100

Code **22,000,441**



L1987

Yellow re-enforced Screw-in insulator
Pack of 25

Code **50,000,322**



Bucket of 100

Code **50,001,192**



EGG INSULATOR

Black pack of 10

Code **50,000,942**



White pack of 10

Code **22,000,571**

A2010



Long stand-off insulator

Bag of 15

Code **50,001,542**



E240

Nail-on stand-off pig-tail

Bag of 10

Code **50,000,872**

CR180

Stand-off insulator rope/polytape

Bag of 10

Code **50,001,242**



ELRUB

Poly tape insulator
Shell of 10 pieces.

Code **50,000,521**



CR40

Screw-in, tape/rope/polywire

Bag of 25


Code **50,001,002**



AN40

Polytape insulator for wood
Bag of 10

Code **19,000,261**

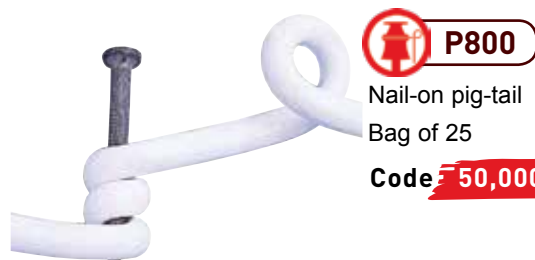

P800

Nail-on pig-tail

Bag of 25

Code **50,000,692**



ISO IP

Nail-on insulator

Bag of 25

Code **50,000,945**



ISO IPC

Staple & Insulator

Bag of 50

Code **50,000,943**

Insulators



INSULATED TUBE FOR HIGH TENSILE WIRE

Coil of 12 m

Code **50,000,305**

100mm lengths bags of 50

Code **50,000,325**



PIN LOCK INSULATOR

Bag of 25

Code **22,001,111**



V1505

Adaptable post insulator

Bag of 25

Code **17 000 322**



CLAW WIRE

Claw wire insulator for wood posts

Bag of 25

Code **22,001,011**



A 6000

Corner post insulator for polytape

Code **17,000,272**



LOCKED INSULATOR

Pack of 25 pieces

Code **50,000,246**

Bucket of 100 pieces

Code **50,000,543**

**NEW
PATENT**

Gate Handles & Accessories



PBI

High UV protection.
Inside spring.
Smooth plastic - very strong.



Black

Bulk - 1 piece

Code **50,000,222**



Orange

Bulk - 1 piece

Code **50,002,007**

Bag of 5 pieces

Code **50,001,082**



Apple green

Bulk - 1 piece

Code **16,000,015**



Yellow

Bulk - 1 piece

Code **16,000,105**



Purple

Bulk - 1 piece

Code **16,000,025**



Pink

Bulk - 1 piece

Code **16,000,014**



PMAX ORANGE



Large gate handle

Code **16,000,222**



GREEN GATE HANDLE



Code **16,000,102**



P200

Code **16,000,212**

Gate handle



Posts, Gate Handles & Accessories



PLASTIC POST

Chapron standard 1,05 M

White box of 20

Code **07,000,022**



PLASTIC POST

Chapron standard 1,60 M

White box of 20

Code **07,000,042**



A4021

2-way anchor loose

Code **50,000,972**



AUTOSTAR 65

Code **21,000,261**

Retractable reel 65 M



LOADED C3

Code **21,000,195**

Polytape 200M



C3 REEL

Polywire Poly 6 300M

Code **21,000,202**



C3 REEL

500 metre capacity

Code **21,000,201**



A3P

3-way anchor

Shell of 2

Code **14,001,391**



GALVANIZED SPRING DIAMETER 23 MM



5 M Ø 23 mm

Code **50,001,272**



GALVANIZED SPRING



5 M Ø 52 mm

Code **50,000,242**

7 M Ø 52 mm


Code **50,000,241**



KIT PMAX

Code **14,000,171**

Black handle gate kit



P210

Code **50,001,022**

Compression spring gate handle



↑
Stainless steel spring

Fencing Accessories



TESTER C 15000

Code **14,000,751**



UNDERGROUND CABLE DOUBLE INSULATED



GALVANIZED WIRE DIAMETER 2.5 MM

25 M 1.6mm

Code **40,000,393**

25 M 2.5mm

Code **40,000,400**

50 M 1.6mm

Code **40,000,394**

50 M 2.5mm

Code **40,000,406**

100 M 1.6mm

Code **40,000,395**

100 M 2.5mm

Code **40,000,399**



CUT OUT SWITCH



Code **14,001,271**



LIGHTNING PROTECTION

Code **14,000,811**



ROPE JOINER



6mm Loose

Code **50,011,831**



LINES CONNECTORS



Line to line connection cable

Code **14,000,994**



WIRE CONNECTION

Energiser to line connection cable

Code **14,000,993**



EARTH BAR

For mains fences GALVA
-T- 1,00 M

Code **07,000,330**



INSULATOR DRIVER FOR DRILL


Code **14,001,111**



FENCING PLIERS

Code **01,000,052**

Multipurpose pliers.
To cut and bend wire
or remove nails.

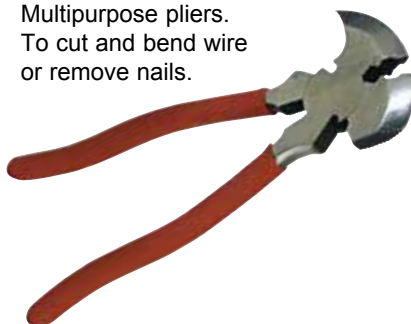


For battery fences
Ø 7 mm 0,30 M

Code **18,000,291**

Fencing Accessories



WARNING SIGN



Code **18 000 032**




BARBED WIRE STRAINER

Code **01,000,050**



SPINNING JENNY

Code **60,000,202**

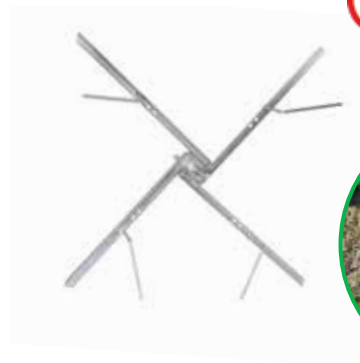

SPRING CLIP WIRE RATCHET STRAINER

Code **01,000,055**



COMPRESSION SPRING

Code **16,000,042**

Compensating spring for HT wire



RATCHET STRAINER WITH INSULATOR

Code **01,000,057**



ALUMINIUM LINE STRAINER

Rotating Aluminium tensioner
Pack of 2

Code **14,000,313**



EGG + HOOK

Heavy duty corner insulator

Code **50,000,272**



Nets



SHEEP NET

Code **02,000,012**

3 stainless steel wires 0.20 mm
Welded meshes

Length 50 m

Height Above Ground 0.85 M

14 posts

1 repair kit



POULTRY NET - DOUBLE PRONG

Green / Orange

Code **02,000,032**

Welded meshes

Length 50 m

Height Above Ground 1.10 M

14 posts - double prong

1 repair kit





Ireland



Electric Fence Catalogue Ireland

Wires
Posts
Insulators

Energisers
Fencing
Accessories



CDS Agri wholesale, Skeen, Co. Sligo.

Tel 071 91 66616 | E-mail: sales@cdsagri.ie

Web: www.cdsagri.ie | www.chapron-international.com

Due to ongoing product development, we reserve the right to change specification without prior notice. All presented images of products does not constitute a commercial offer and may vary in colour and size

Printfix.ie